


- ◆品牌：中联科创（ZLKC）
- ◆规格：2/3" C型 f=12mm F2.4
- ◆宽带增透膜，提高透光性能
- ◆5百万像素高精成密成像
- ◆高分辨率、大景深、无畸变
- ◆紧凑外形小，抗震性能好
- ◆适用工业检测，工业自动化等

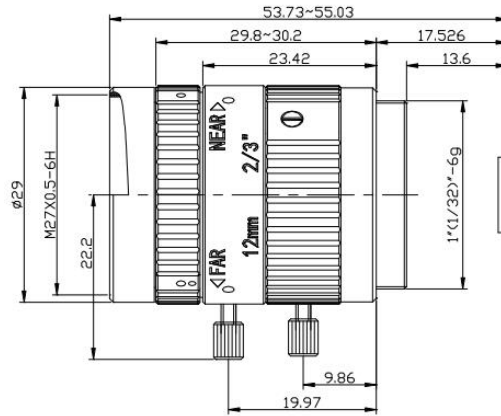

产品规格书：

500万像素 12mm 工业镜头 C Mount		物距 Working Distance	倍率 Optical Magnification	视野 2/3"Field of View (mm)		
型号 Model	FM1224MP5	mm	-	H	V	
像机尺寸 Image Size	2/3-inch	900	0.0132X	666.7	500.0	
焦距 Focal length	12mm	850	0.0139X	633.1	474.8	
光圈范围 F No.	F2.4-16	800	0.0148X	594.6	445.9	
最短物距 M. O. D(m)	0.1-Inf.	750	0.0158X	557.0	417.7	
控制方式 Operation	Iris	Manual 手动调整	700	0.0169X	520.7	390.5
	Focus	Manual 手动调整	650	0.0182X	483.5	362.6
视场角 Angle of View (D×H×V)	2/3"	49.3° × 40.3° × 30.8°	600	0.0197X	446.7	335.0
	1/1.8"	40.3° × 32.5° × 25.7°	550	0.0214X	411.2	308.4
	1/2"	36.9° × 29.9° × 22.6°	500	0.0235X	374.5	280.9
畸变 TV Distortion	<0.2%	450	0.0261X	337.2	252.9	
光学后焦 BFL	12.5mm	400	0.0292X	301.4	226.0	
法兰距 Flange FL	17.526mm	350	0.0333X	264.3	198.2	
接口 Mount	C-Mount	300	0.0386X	228.0	171.0	
近摄视野 2/3"FOV	8.1cm×6.1cm (WD=100mm)	250	0.0461X	190.9	143.2	
外形尺寸 Dimension	Φ 29×36mm	200	0.0570X	154.4	115.8	
重量 Weight	75.0g	150	0.0747X	117.8	88.4	
分辨率 Resolution	5.0MP	100	0.1084X	81.2	60.9	
滤镜尺寸 Filter	M27x 0.5	50	0.1978X	44.5	33.4	
工作温度 Working Temperature	-20°C ~ +60°C	-	-	-	-	