


- ◆品牌：中联科创（ZLKC）
- ◆规格：2/3" C型 f=25mm F1.8
- ◆宽带增透膜，提高透光性能
- ◆5百万像素高精成密成像
- ◆高分辨率、大景深、无畸变
- ◆紧凑外形小，抗震性能好
- ◆适用工业检测，工业自动化等

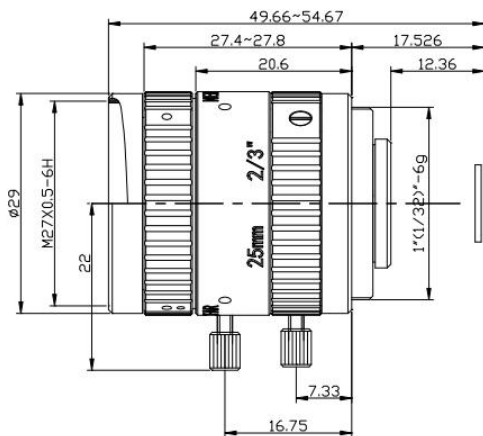

产品规格书：

500万像素 25mm 工业镜头 C Mount		物距 Working Distance	倍率 Optical Magnifi- cation	视野 2/3"Field of View (mm)		
型号 Model	FM2518MP5	mm	-	H	V	
像机尺寸 Image Size	2/3-inch	900	0.0293X	300.3	225.3	
焦距 Focal length	25mm	850	0.0310X	283.9	212.9	
光圈范围 F No.	F1.8-16	800	0.0330X	266.7	200.0	
最短物距 M. O. D(m)	0.2-Inf.	750	0.0352X	250.0	187.5	
控制方式 Operation	Iris	Manual 手动调整	700	0.0377X	233.4	175.1
	Focus	Manual 手动调整	650	0.0406X	216.8	162.6
视场角 Angle of View (D×H×V)	2/3"	25° × 20° × 15°	600	0.0440X	200.0	150.0
	1/1.8"	21° × 17° × 13°	550	0.0481X	183.0	137.2
	1/2"	18.5° × 15° × 11°	500	0.0512X	171.9	128.9
畸变 TV Distortion	<0.3%	450	0.0588X	149.7	112.2	
光学后焦 BFL	13.2mm	400	0.0663X	132.7	100.0	
法兰距 Flange FL	17.526mm	350	0.0759X	115.9	87.0	
接口 Mount	C-Mount	300	0.0887X	99.2	74.4	
近摄视野 2/3"FOV	65.7mm×49.3mm (WD=200mm)	250	0.1067X	82.5	61.8	
外形尺寸 Dimension	Φ 29×32mm	200	0.1340X	65.7	49.3	
重量 Weight	68.0g	150	0.1799X	49.0	36.7	
分辨率 Resolution	5.0MP	100	0.2738X	32.1	24.1	
滤镜尺寸 Filter	M27x 0.5	-	-	-	-	
工作温度 Working Temperature	-20°C ~ +60°C	-	-	-	-	