


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：4/3" C型 f=35mm F2.8
- ◆ 多层镀膜，有效提高透过率
- ◆ 2000万像素高品质影像
- ◆ 高对比度、大景深设计
- ◆ 畸变小于0.1%
- ◆ 适用机器视觉，工业监控等

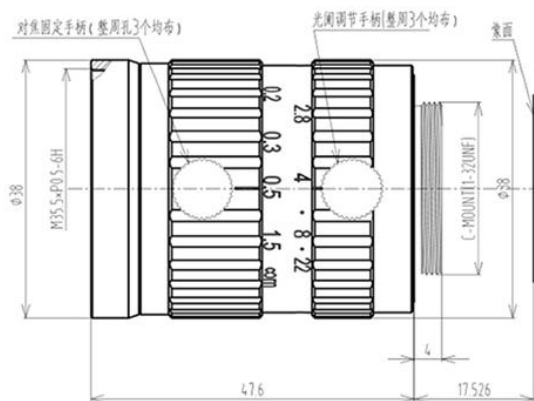

产品规格书：

2000万像素 35mm 低畸变 FA 镜头 C Mount		物距 Working Distance	倍率 Optical Magnification	视野 4/3" Field of View (mm)		
型号 Model	KM3528MP20	mm	X	H	V	
相机靶面 Image Size	4/3-inch	5000	0.0069X	2532.7	1903.1	
焦距 Focal length	35mm	2000	0.0174X	1010.5	759.1	
光圈范围 F No.	F2.8-22	1000	0.0349X	627.8	378.0	
最短物距 M. O. D(m)	0.2-Inf.	900	0.0388X	452.6	339.9	
控制方式 Operation	Iris	Manual 手动调整	800	0.0437X	401.9	301.8
	Focus	Manual 手动调整	700	0.0500X	351.2	263.7
视场角 Angle of View (D×H×V)	4/3"	34.9° × 27.9° × 20.9°	600	0.0585X	300.6	225.6
	1"	25.8° × 20.6° × 15.5°	550	0.0639X	275.3	206.6
	2/3"	17.8° × 14.3° × 10.7°	500	0.0703X	250.0	187.6
畸变 Distortion	<0.01%	450	0.0783X	224.7	168.7	
光学后焦 BFL	22.9mm	400	0.0882X	217.8	163.4	
接口 Mount	C-Mount	350	0.1010X	199.5	149.7	
近摄视野 Object Dimension	149.2mm × 111.9mm (WD=300mm)	300	0.1181X	149.2	111.9	
外形尺寸 Dimension	Φ38 × 47.6mm	250	0.1421X	124.1	93.0	
重量 Weight	236.0g	200	0.1805X	97.7	73.2	
滤镜尺寸 Filter Thread	M35.5x 0.5	-	-	-	-	
工作温度 Working Temperature	-20°C ~ +60°C	-	-	-	-	