


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 8mm 5MP
- ◆ 多层镀膜，有效抑制杂光和鬼像
- ◆ 高分辨率、大景深、低畸变
- ◆ 紧凑型结构，抗震性能好
- ◆ 适用工业检测，视觉定位等

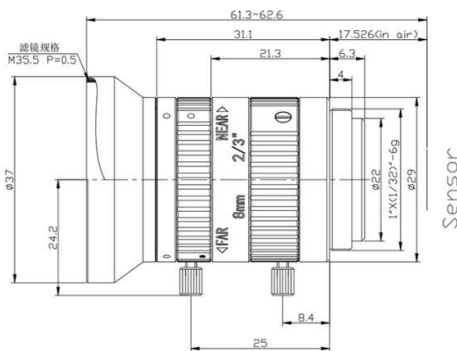

## 产品规格书：

500 万像素 8mm 手动光圈镜头 C Mount		工作距离	倍率	视野 2/3"(mm)		
型号 Model	<b>FM0824MP5</b>	mm		横边 H	纵边 V	
像机尺寸 Image Size	2/3-inch	1000	0.008X	1100.0	825.0	
焦距 Focal length	8mm	900	0.009X	990.0	742.5	
光圈范围 F No.	F2.4-16	850	0.009X	935.0	701.3	
最短物距 M.O.D(m)	0.1-Inf.	800	0.010X	880.0	660.0	
控制方式 Operation	Iris	Manual 手动调整	750	0.010X	825.0	618.8
	Focus	Manual 手动调整	700	0.011X	770.0	577.5
视场角 Horizontal Angle of View (D×H×V)	2/3"	69°×57.6°×44.8°	650	0.011X	715.0	536.3
	1/1.8"	58°×47.9°×36.7°	600	0.012X	660.0	495.0
	1/2"	53.1°×43.6°×33.4°	550	0.013X	605.0	453.8
	1/2.9"	42.2°×37.1°×23.2°	500	0.016X	550.0	412.5
畸变 Distortion	-0.2%	450	0.018X	595.0	371.3	
光学后焦 BFL	12.2mm	400	0.020X	440.0	330.0	
法兰后焦 Flange BFL	17.526mm	350	0.023X	385.0	347.5	
接口 Mount	C-Mount	300	0.027X	330.0	247.5	
近摄视野 Object Dimension	11.0cm×8.25cm(WD=100mm)	250	0.032X	275.0	206.3	
外形尺寸 Dimension (Φ×L)	Φ37×50.1mm	200	0.040X	220.0	165.0	
重量 Weight	90.0g	150	0.053X	165.0	123.8	
分辨率 Horizontal Resolution	5.0MP	100	0.080X	110.0	82.5	
滤镜 Filter Thread	M35.5 P=0.5mm	80	0.100X	88.0	66.0	
工作温度 Temperature	-20°C ~ +60°C	50	0.160X	55	41.3	