


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：4/3" C 型 f=25mm F2.8
- ◆ 多层镀膜，有效提高透过率
- ◆ 2000 万像素高品质影像
- ◆ 高对比度、大景深设计
- ◆ 畸变小于 0.1%
- ◆ 适用机器视觉, 工业监控等

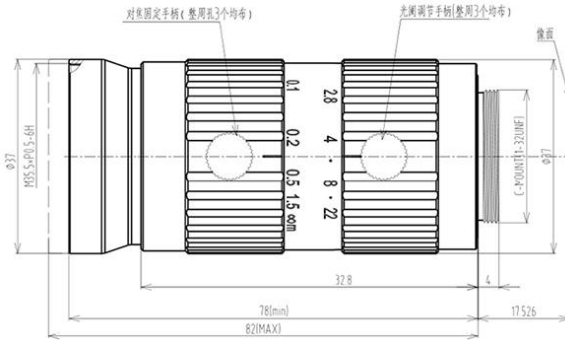

产品规格书：

2000 万像素 25mm 低畸变 FA 镜头 C Mount		物距 Working Distance	倍率 Optical Magnification	视野 4/3"Field of View(mm)		
型号 Model	KM2528MP20	mm	X	H	V	
相机靶面 Image Size	4/3-inch	5000	0.005X	3441.1	2580.8	
焦距 Focal length	25mm	2000	0.013X	1384.5	1038.4	
光圈范围 F No.	F2.8-22	1000	0.025X	898.8	524.1	
最短物距 M.O.D(m)	0.1-Inf.	900	0.028X	63.2	427.7	
控制方式 Operation	Iris	Manual 手动调整	800	0.031X	561.6	421.2
	Focus	Manual 手动调整	700	0.036X	493.0	369.8
视场角 Angle of View (DxHxV)	4/3"	45.9°x37.5°x28.5°	600	0.042X	424.4	318.3
	1"	34.2°x27.6°x20.9°	550	0.045X	390.0	292.5
	2/3"	23.9°x19.2°x14.5°	500	0.050X	355.7	266.8
畸变 Distortion	<0.03%	450	0.055X	321.4	241.0	
光学后焦 BFL	29.6mm	400	0.061X	287.0	215.3	
接口 Mount	C-Mount	350	0.070X	252.6	189.5	
近摄视野 Object Dimension	218.2mmx163.7mm(WD=300 mm)	300	0.081X	218.2	163.7	
外形尺寸 Dimension	Φ37x78mm	250	0.096X	183.8	137.8	
重量 Weight	182.0g	200	0.118X	149.2	111.9	
滤镜尺寸 Filter Thread	M35.5x 0.5	150	0.154X	114.6	86.0	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.221X	79.8	59.8	