


- ◆ 品牌：中联科创 (ZLKC)
- ◆ 规格：2/3" C 型 f=8mm F1.4
- ◆ 多层镀膜，有效抑制杂光和鬼像
- ◆ 5 百万像素高品质影像
- ◆ 高分辨率、高对比度、低畸变
- ◆ 紧凑型结构，抗震性能好
- ◆ 适用工业检测, 道路监控等

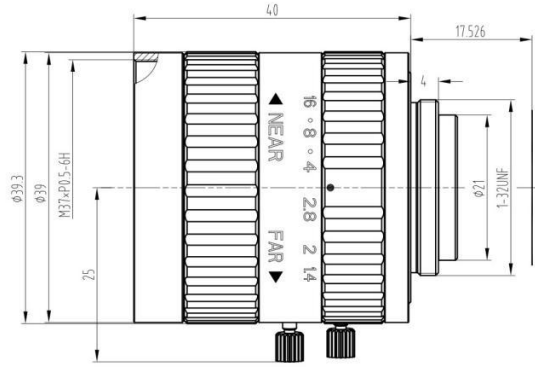

产品规格书：

| 500 万像素 8mm 低畸变 FA 镜头 C Mount | | 物距 Working Distance | 倍率 Magnifica tion | 视野 2/3"Field of View(mm) | | |
|---------------------------------|-------------------------------|---------------------------|-------------------------|-----------------------------|-------|-------|
| 型号 Model | HM0814MP5 | mm | - | H | V | |
| 像机尺寸 Image Size | 2/3-inch | 900 | 0.009X | 976.8 | 731.5 | |
| 焦距 Focal length | 8mm | 850 | 0.010X | 923.3 | 691.4 | |
| 光圈范围 F No. | F1.4-16 | 800 | 0.010X | 869.8 | 651.3 | |
| 最短物距 M.O.D(m) | 0.1-Inf. | 750 | 0.011X | 816.3 | 611.2 | |
| 控制方式 Operation | Iris | Manual 手动调整 | 700 | 0.012X | 762.8 | 571.1 |
| | Focus | Manual 手动调整 | 650 | 0.013X | 709.3 | 531.0 |
| 视场角 Angle of View (DxHxV) | 2/3" | 66.8°x55.8°x43.3° | 600 | 0.014X | 655.8 | 490.9 |
| | 1/2" | 53.1°x42.5°x32.4° | 550 | 0.015X | 602.3 | 450.8 |
| 畸变 Distortion | <0.2% | 500 | 0.016X | 548.8 | 410.7 | |
| 光学后焦 BFL | 10.74mm | 450 | 0.018X | 495.3 | 370.6 | |
| 接口 Mount | C-Mount | 400 | 0.020X | 441.8 | 330.5 | |
| 近摄视野 Object Dimension | 334.8mmx250.3mm(WD=300 mm) | 350 | 0.023X | 388.3 | 290.4 | |
| 外形尺寸 Dimension | Φ39x40mm | 300 | 0.027X | 334.8 | 250.3 | |
| 重量 Weight | 115.0g | 250 | 0.032X | 281.2 | 210.2 | |
| 分辨率 Horizontal Resolution | 5MP | 200 | 0.039X | 227.7 | 170.0 | |
| 滤镜尺寸 Filter Thread | M37x 0.5 | 150 | 0.052X | 174.2 | 129.9 | |
| 工作温度 Working Temperature | -20°C ~ +60°C | 100 | 0.075X | 120.7 | 89.8 | |